



Communication enabler

4511

- Programming display for system 4000 and 9000 devices as well as selected system 3000 devices
- Modbus RTU protocol interface over RS-485
- Monitor process value from the built-in display
- High 2.5 kV isolation to host unit
- Shielded RJ45 connector on top



Application

- The 4511 detachable display adds Modbus RTU RS-485 serial communications to all current and future 4000/9000 units.
- The unit converts a wide array of sensors and analog device signals measured by the system 4000 like uni- and bipolar mA and voltage signals, potentiometer, Lin. R, RTD and TC, to a Modbus communication line signal.
- When mounted on a system 9000 device any signal coming from or going to I.S. classified area, like AI, AO, DI and DO signals, can be converted to a Modbus network.
- All individual unit operating parameters can easily and quickly be configured by using the Modbus communication or by using the front display menu.
- The easily readable 4511 display can be used to read the process signal, simulate the output signal, indicate sensor errors and internal device errors.
- The 4511 can be moved from one device to another. The individual system 3000 / 4000 / 9000 device configuration of a transmitter can be saved and downloaded to subsequent transmitters.


Technical characteristics

- 4511 has full functionality for unit programming, process signal monitoring and diagnostics handling.
- Multidrop half-duplex connection via shielded RJ45 connector.
- High safe galvanic isolation of 2.5 kVAC between the serial wiring and the connected system 4000 / 9000 units.
- Modbus parameters such as address, baud rate, stop bit(s), and parity bit are configured from the 4511 display, which also stores parameters.

Mounting / installation / programming

- Mounting in Zone 2 / Div 2.
- All configuration data from a PR 3000 / 4000 / 9000 device can be transferred to a PC using the PR 4590.
- Programmed parameters can be protected by a userdefined password.
- When mounted on devices that are installed upside down, a menu item allows the display on the 4511 to be rotated 180° and the up/down buttons to switch function.

Applications

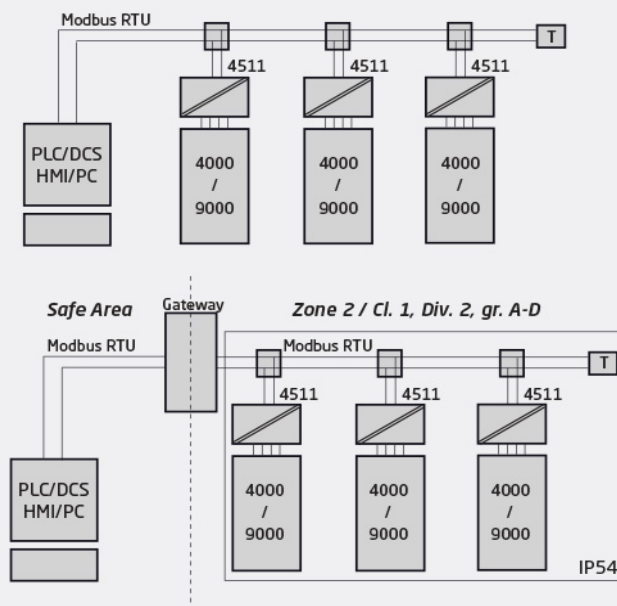

Order

| Type | Description |
|------|-----------------------|
| 4511 | Communication enabler |
| 4590 | Configmate interface |

Environmental Conditions

| | |
|----------------------------|---|
| Operating temperature..... | -20°C to +60°C |
| Storage temperature..... | -20°C to +85°C |
| Relative humidity..... | < 95% RH (non-cond.) |
| Protection degree..... | IP20 |
| Installation in..... | Pollution degree 2 & meas. / overvoltage cat. II |

Mechanical specifications

| | |
|--|-----------------------|
| Dimensions (HxWxD)..... | 73.2 x 23.3 x 26.5 mm |
| Dimensions (HxWxD) w/ 4000/9000 unit..... | 109 x 23.5 x 131 mm |
| Weight approx..... | 30 g |
| Connection..... | RJ45 - shielded |

Common specifications

Supply

| | |
|--------------------------|--------|
| Max. required power..... | 0.15 W |
|--------------------------|--------|

Isolation voltage

| | |
|---|--|
| Isolation voltage, test / working..... | 2.5 kVAC / 250 VAC reinforced isolation |
|---|--|

Response time

| | |
|---|--|
| Response time..... | < 20 ms |
| Signal / noise ratio..... | > 60 dB |
| Update rate..... | > 50 Hz |
| Extended EMC immunity: NAMUR NE21, A criterion, burst..... | No loss of communication |
| Signal type..... | RS-485 half duplex |
| Serial protocol..... | Modbus RTU |
| Modbus mode..... | RTU - slave |
| Devices on an RS485 line..... | Up to 32 (w/o a repeater) |
| Data rates, baud..... | 2400, 4800, 9600, 19200, 38400, 57600, 115200 |
| Automatic baudrate detection..... | Yes - can be configured ON or OFF |
| Parity..... | Even, Odd, None |
| Stop bit(s)..... | 1 or 2 |
| Digital addressing..... | 1...247 |
| Response delay..... | 0...1000 ms |

I.S. / Ex marking

| | |
|-------------|--|
| ATEX..... | II 3 G Ex ec IIC T5 |
| IECEX..... | Ex ec IIC T5 Gc |
| FM, US..... | Cl I, Div 2, Gp A, B, C, D T5; Cl I, Zn 2, AEx ec IIC T5 Gc |
| FM, CA..... | Cl I, Div 2, Gp A, B, C, D T5; Ex ec IIC T5 Gc |

Observed authority requirements

| | |
|-----------|---------------------------------|
| EMC..... | 2014/30/EU & UK SI 2016/1091 |
| LVD..... | 2014/35/EU & UK SI 2016/1101 |
| ATEX..... | 2014/34/EU & UK SI 2016/1107 |
| RoHS..... | 2011/65/EU & UK SI 2012/3032 |
| EAC..... | TR-CU 020/2011 |

Approvals

| | |
|--------------------------|------------------------------|
| ATEX..... | DEKRA 13ATEX0098 X |
| IECEX..... | DEK 13.0026 X |
| c FM us..... | FM22US0014X / FM22CA0009X |
| UKEX..... | DEKRA 21UKEX0167X |
| c UL us, UL 61010-1..... | E314307 |
| DNV Marine..... | TAA00000JD |